


NO DIG

EQUIPMENT
THE HORIZONTAL BORING SPECIALISTS

BB110 bed borer

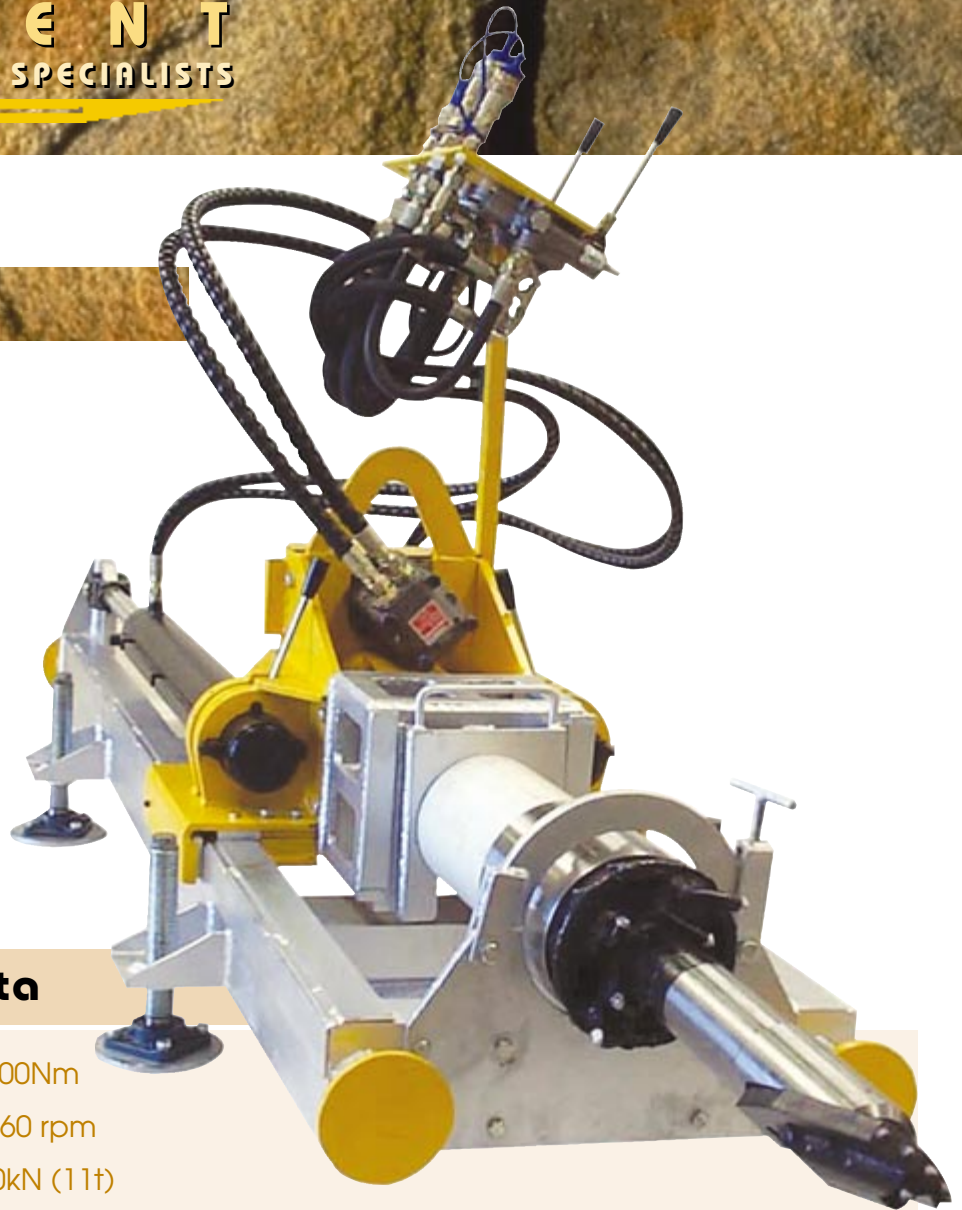

specifications and data

TORQUE (max.):	1,500Nm
SPEED RANGE:	0 - 60 rpm
THRUST (max.):	100kN (11t)
STROKE (3 stage)	1150mm
BASE RIG DIMENSIONS:	2100L x 600W x 1200H
PIPE SIZES INSTALLED:	up to 250mm diameter
BORING DISTANCES:	50m (dependant on ground conditions)
OPERATING PIT SIZE:	2.4m dia/ 2.4m x 1.2m Rectangular
GUIDANCE SYSTEM:	ELECTRONIC THEODOLITE c/w 90 Deg, eye piece, 10 sec. accuracy
HYDRAULIC POWER PACK:	Kohler 25hp Petrol Engine, 19 kW @ 3600 rpm (cont.rating) 70Lpm @ 2500 PSI

Machine supplied complete for installation of 20m bores.

15 Wildfire Road, Maddington WA 6109 • PO Box 2, Maddington WA 6989

Ph: (08) 9493 0642 • Fax: (08) 9493 0672 • Email: criley@nodigequipment.com.au

www.nodigequipment.com.au